### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 10 September 2004 (10.09.2004)

**PCT** 

## (10) International Publication Number WO 2004/075754 A1

(51) International Patent Classification<sup>7</sup>: G01P 5/00, G10K 11/34

A61B 8/06,

(21) International Application Number:

PCT/EP2004/001913

(22) International Filing Date: 26 February 2004 (26.02.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

103 08 821.0 103 12 883.2 27 February 2003 (27.02.2003) DE 22 March 2003 (22.03.2003) DE

(71) Applicant (for all designated States except US): UNI-VERSITÄT DUISBURG-ESSEN [DE/DE]; Universitätsstrasse 2, 45141 Essen (DE). (72) Inventor; and

(75) Inventor/Applicant (for US only): BUCK, Thomas [DE/DE]; Am Kothen 2A, 40822 Mettmann (DE).


(74) Agent: GESTHUYSEN, VON ROHR & EGGERT; Huyssenallee 100, 45128 Essen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR ULTRASOUND MEASUREMENT OF BLOOD FLOW

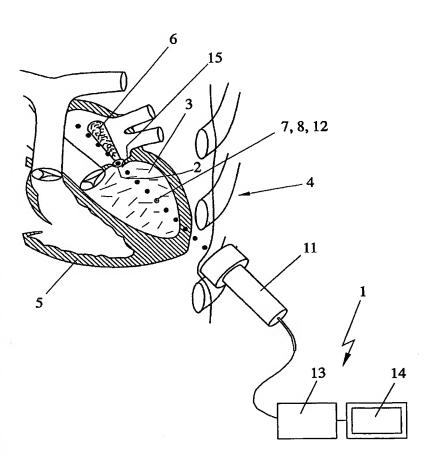

(57) Abstract: A method and a device (1) for ultrasound measurement of the blood flow through a heart valve are proposed. To permit a simple, automated measurement, it is proposed that the measurement area (9) of a measurement beam (7) is moved three-dimensionally by means of a multi-array transducer (11) and continuously evaluated for characteristic Doppler signals. It is further proposed to evaluate several measurement beams (7) with offset spatial, partially overlapping measurement areas (9) and/or several reference beams (8) with offset spatial measurement areas (10) for determination of the opening surface area, the volumetric flow rate, the flow volume and/or a value proportional thereto.

#### 

GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

### Published:

with international search report

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.